33474 FL AGOR/A LED 150W NW

LED floodlight

5905339334749









Kanlux AGOR LED is a series of high-power floodlights. Their solid and durable construction ensures IP65 tightness. Kanlux AGOR floodlights are also symmetrical (AGOR) or asymmetrical light distribution (AGOR/A). You will successfully use them to illuminate sports or industrial areas, large advertising boards, warehouses and building facades. The durability and reliability of Kanlux AGOR floodlights is confirmed by a 5-year warranty.

GENERAL DATA:

Colour: black
Place of assembly: wall mounted, ceiling mounted, surface mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 1m
Compatible with a dimmer: no
Width [mm]: 305
Height [mm]: 350
Depth [mm]: 60
Mercury content: no
Mercury content in the lamp [mg]: 0
Integrated LED light source: yes

TECHNICAL DATA:


Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Power factor: 0.98
Maximum power [W]: 150
Class of protection against electric shock: I
Diode type: LED SMD
Luminous flux [lm]: 19500
Useful luminous flux of the light source Φuse [lm]: 13650
Useful luminous flux of the light source Φuse [lm]: in narrow cone (90°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: 6
Colour rendering index: 80
Cap (Light source): Free cable ends
Service life [h]: 50000
Number of on/off cycles: ≥25000
Lighting angle [°]: X45/Y80
Luminous efficiency of the lamp [lm/W]: 130

Date of issue: 09.10.2024, 11:52
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33474 FL AGOR/A LED 150W NW

LED floodlight






Ambient temperature range to which the product can be exposed: -40÷35
Enclosure material: aluminum alloy
Protective glass material: Tempered glass
Connection type: Free cable ends
Wire type: H05RN-F
Wire diameter [mm²]: 1
Reflector type: asymmetric
Lamp-heating time [s]: ≤0,5
Lamp-ignition time [s]: ≤0,5
The fixture is movable vertically [°] : 180
IK class: 05
IP class: 65

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 2
Number of units in the secondary packaging : 1
Number of units in the packaging: 2
Net unit weight [g] : 3810
Grammage [g]: 4215
Gross unit weight [g] : 4004
Length of a unit pack [cm]: 31
Width of a unit pack [cm]: 7
Height of a unit pack [cm]: 36.5
Weight of a cardboard box [kg] : 8.43
Width of a cardboard box [cm]: 16
Height of a cardboard box [cm]: 39
Length of a cardboard box [cm] : 33
Volume of a cardboard box [m³] : 0.020592

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

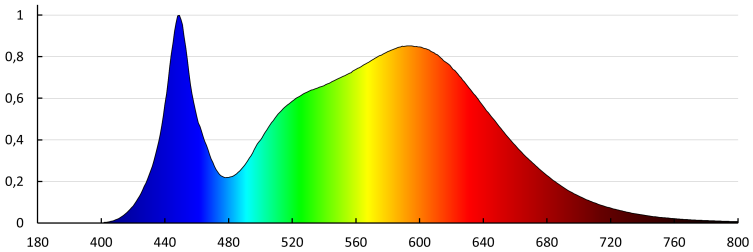


Date of issue: 09.10.2024, 11:52
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33474 FL AGOR/A LED 150W NW

LED floodlight

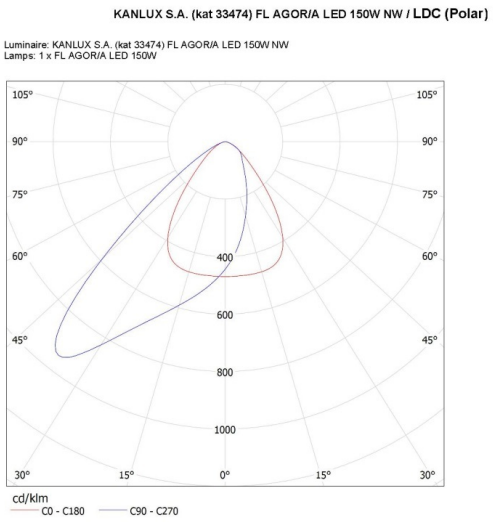

Date of issue: 09.10.2024, 11:52

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN