SYLVANIA

Focused on the Essentials: Durable, Efficient, Accessible.

START eco Waterproof

Start eco Waterproof is the Sylvania's new weatherproof surface and suspended luminaire range designed for garages, car parks and industrial applications.

Integrated switch allows to choose between warm white (3000K), neutral white (4000K) and cool white (6500K) colour temperatures.

Easy selection between two different light output levels by using the integrated switch in each different lengths.

sylvania-group.com

START eco Waterproof

Features

Modular, CCT switch, surface/suspended mounted weatherproof luminaire range for garages, car parks and industrial applications.

- Perfect for lighting of industrial facilities, garages, car parks, workshops
- Integrated switch allows to choose between warm white (3000K), neutral white (4000K) and cool white (6500K) colour temperatures
- Easy selection between two different light output levels by using the integrated switch in each different lengths
- 600 / 1200 / 1500mm lengths
- Efficacy 150lm/W
- CRI >80, SDCM<5 (4000K SDCM<~6/7)
- High protection class: IP65
- Heavy duty housing: IK08
- Operating temperature range: -20 to +40°C
- Lifespan: up to 62,000 hrs (L70B50)
- 5 years warranty
- Easy to install with stainless steel fixing brackets for ceiling mounting

Product information

Code	Description	Housing Colour	Total power consumption (W)	Fixture Lumen (lm)	Luminaire efficacy (lm/W)	Correlated Colour Temperature (K)	Nominal Product Height (mm)	Nominal Product Length (mm)	Nominal Product Width (mm)
START Eco Waterproof									
0047411	Start eco Waterproof 600 IP65 1200/2400lm 830/865	Grey	8 / 16	1200 / 2400	150	3000 / 4000 / 6500	84	600	80
0047412	Start eco Waterproof 1200 IP65 2400/4800lm 830/865	Grey	16 / 32	2400 / 4800	150	3000 / 4000 / 6500	84	1200	80
0047413	Start eco Waterproof 1500 IP65 3000/6000lm 830/865	Grey	20 / 40	3000 / 6000	150	3000 / 4000 / 6500	84	1500	80

Additional Images

START eco Waterproof

Photometric Data



START eco Waterproof 600mm



START eco Waterproof 1200mm



START eco Waterproof 1500mm

Dimensions (mm)

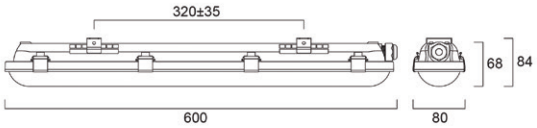

START eco Waterproof 600mm

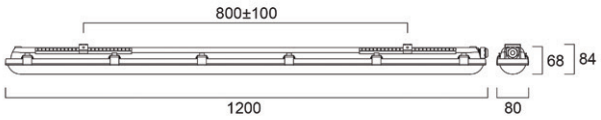

START eco Waterproof 1200mm

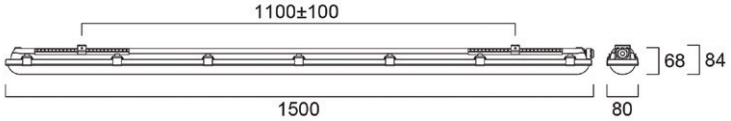

START eco Waterproof 1500mm

SYLVANIA

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. April 2025

sylvania-group.com

A Feilo Sylvania Company