

SYLVANIA



Stylish yet resistant

Your **Home** SylSplash



SylSplash is a range of slim water resistant LED luminaires that provide an ideal solution for applications such as garages, utility and hobby rooms. Available in 754mm, 1284mm and 1564mm nominal lengths.

SylSplash can be used in garages, utility and hobby rooms and anywhere that an increase in damp, moisture or dust is likely to occur. SylSplash is an energy efficient solution with a 30,000 hour lifetime, backed by a 3 year warranty for peace of mind.

sylvania-group.com

SylSplash



The new SylSplash range provides consumers with the latest LED technology in a water resistant luminaire. SylSplash is available in a choice of three different lengths and offers easy installation on the ceiling or wall as the mounting brackets can be positioned freely on the luminaire. The colour temperature is switchable using the wall switch to change between warm white (3000K) cool white (4000K) and daylight (6500K).


Features

- LED integrated waterproof fixture in 600mm, 1200mm, 1500mm
- High efficiency reaching 125 lm/w and 30,000hrs lifetime
- Easy access to electrical terminal through end caps with bayonet lock
- Complete protection against dust, and resistant against splashes of water, cleanable with a damp cloth
- Linkable and tool-free electrical connection due to push-in terminal
- Flexible installation as mounting brackets can be positioned freely on the luminaire
- TriTone colour selectable with wall switch operation (3000,4000,6500K)
- Ideal for any industrial facilities, garages, car parks, workshops


Product information

Code	Description	Voltage (V)	Power (W)	Luminous Flux (lm)	Efficiency (lm/W)	Beam Angle (°)	CRI	Colour Temp (K)	IP Rating	IK Rating	Housing Colour	Length (mm)	Width (mm)	Height (mm)	Average Life (h)
SylSplash TriTone															
0090230	SYLSPLASH IP65 L600 2500LM 3CCT	220-240	20	2500	125	120	80	3000/4000/6500	IP65	IK06	White	600	53	35	30,000
0090231	SYLSPLASH IP65 L1200 5000LM 3CCT	220-240	40	5000	125	120	80	3000/4000/6500	IP65	IK06	White	1200	53	35	30,000
0090232	SYLSPLASH IP65 L1500 6250LM 3CCT	220-240	50	6250	125	120	80	3000/4000/6500	IP65	IK06	White	1500	53	35	30,000


Additional Images

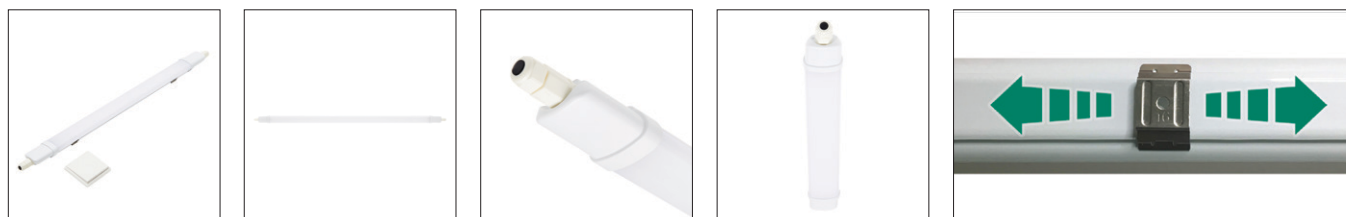


Dimensions (mm)

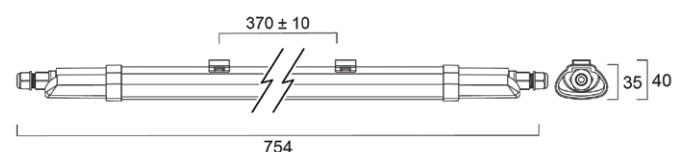

SYLSPLASH IP65 L600 2500LM 3CCT

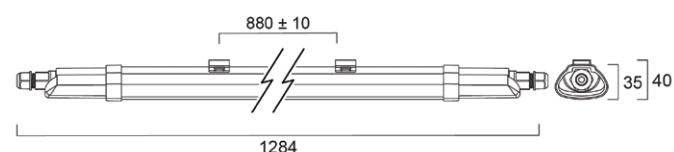

SYLSPLASH IP65 L1200 5000LM 3CCT

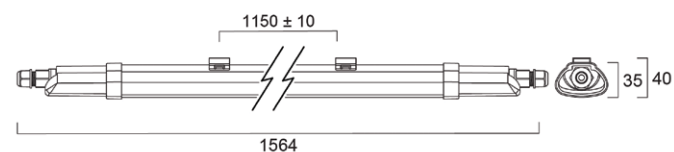

SYLSPLASH IP65 L1500 6250LM 3CCT

*Recommended bracket mounting distance.



sylvania-group.com

A Feilo Sylvania Company



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited. Copyright Feilo Sylvania Europe Limited February 2025