33180 BLINGO P 38W 6060 NW

Recessed-mounted LED panel

5905339331809





In Kanlux BLINGO panels, the LED modules are located on the rear panel wall and light directly downwards. These are backlit panels equipped with lenses that extend the angle of light emission, ensuring the uniformity of illumination. Elimination of the light-conducting plate greatly reduces the possibility of the luminaire yellowing and allows for better light parameters. We also provide a whole range of accessories for Kanlux BLINGO panels.

GENERAL DATA:

Colour: white
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Feeder included: yes
Length [mm]: 595
Width [mm]: 595
Height [mm]: 35
Depth [mm]: 595
Integrated LED light source: yes

TECHNICAL DATA:


Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 38
Class of protection against electric shock: II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 4600
Useful luminous flux of the light source Φuse [lm]: 5700
Useful luminous flux of the light source Φuse [lm]: in sphere (360°)
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L70B50
Number of on/off cycles: ≥30000
Lighting angle [°]: 120

Date of issue: 26.06.2023, 11:33
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33180 BLINGO P 38W 6060 NW

Recessed-mounted LED panel






Luminous efficiency of the lamp [lm/W]: 121
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: steel
Panel/frame material: steel
Connection type: Terminal block
Range of sections of wires used [mm²]: 0,75-1,0
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1620
Grammage [g]: 2274
Length of a unit pack [cm]: 60
Width of a unit pack [cm]: 3.5
Height of a unit pack [cm]: 64
Weight of a cardboard box [kg]: 11.37
Width of a cardboard box [cm]: 20.5
Height of a cardboard box [cm]: 67.5
Length of a cardboard box [cm] : 63
Volume of a cardboard box [m³]: 0.087176

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- BLINGO 62x62 is intended for an alternative size of ceiling systems (625mmx625mm)

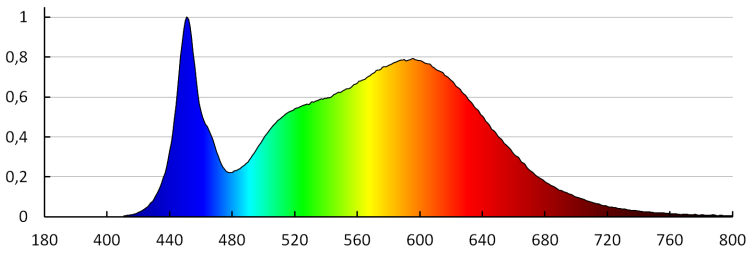


		BLINGO LED				
		BLINGO P 38W 6060 NW	BLINGO R 38W 12030 NW	BLINGO R 38W 6060 NW	BLINGO RU 38W 6060 NW	BLINGO TU 48W 6060 NW
ACCESSORIES	index	33180	29823	29822	29824	29825
ADTR-H 6060 B	29845	✓		✓	✓	
ADTR-H 6060 SR	29844	✓		✓	✓	
ADTR-H 6060 W	29843	✓		✓	✓	
ADTR-H 12030 B	33391		✓			
ADTR-H 12030 SR	33392		✓			
ADTR-H 12030 W	33390		✓			
ADTR-H 76MM 6060 B (on individual order only)	33396					✓
ADTR-H 76MM 6060 SR (on individual order only)	33397					✓
ADTR-H 76MM 6060 W (on individual order only)	33398					✓
CLIPS BLINGO RT	29826	✓	✓	✓	✓	✓
SPN BRAVO S/P 60-62	28504	✓	✓	✓	✓	✓

Date of issue: 26.06.2023, 11:33
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

33180 BLINGO P 38W 6060 NW

Recessed-mounted LED panel

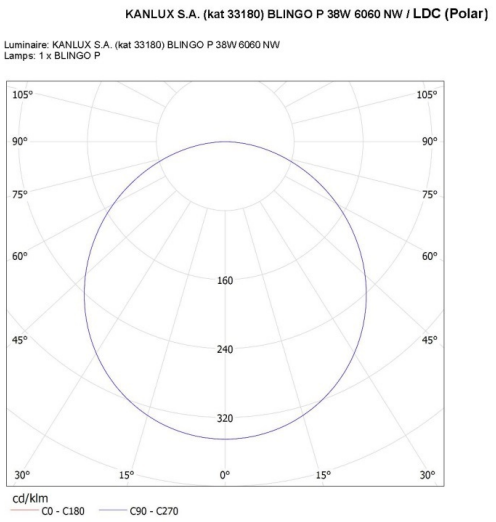

ACCESSORIES

28515	BLINGO DALI SET 38W	Set containing accessories and a power supply unit enabling communication in line with DALI protocol (28515)



Date of issue: 26.06.2023, 11:33

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN