




Durable and efficient lighting for outdoor spaces

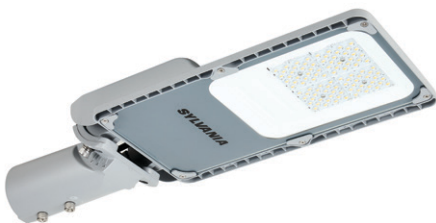

Zephyr

The new generation of Zephyr LED lantern is an advanced lighting solution designed for minor road and area applications, like car parks and perimeter lighting. Constructed from high-quality die-cast aluminium, it offers durability with IK08 protection and IP66 ratings. Available in various sizes and lumen packages (4, 6, 9, 15, and 20 klm),

the lantern delivers an impressive efficacy of up to 157lm/W. Zephyr features a flat glass cover and a Pearl Light Grey finish with adjustable inclination for easy installation. It is designed to withstand extreme weather conditions, making it a reliable and efficient choice for amenity lighting.


Features

- Perfect for amenity including car parks and perimeter lighting
- Small, medium, large size options
- High quality die-cast aluminium housing with Flat glass cover
- Range of lumen packages available: 4, 6, 9, 15, 20klm
- Warm white (3000K) and neutral white (4000K) colour temperatures
- Efficacy up to 157lm/W
- Robust build and protection: IK08 and IP66
- Available in Pearl Light Grey RAL 9022 colour finish
- Supplied with 0.5 metres mains supply cable
- 60mm Post-top or side entry installation with adjustable inclination of $\pm 20^\circ$
- 1000 hours Salt Spray test
- 10 kV surge protection
- Ambient temperature: -25°C to $+50^\circ\text{C}$
- SDCM < 5, CRI > 80
- Lifespan up to 100,000 hours at L80:B50


Product information

Code	Description	Luminous Flux (lm)	Fixture Power (W)	Efficacy (lm/W)	Colour Temp (K)	Dimensions (mm)	Weight (kg)
Zephyr Non-dimmable							
0050582	Zephyr IP66 4Klm 840 Grey	4,250	27	157	4000	515 x 190 x 114	2.5
0050583	Zephyr IP66 6Klm 840 Grey	6,450	43	150	4000	515 x 190 x 114	2.5
0050584	Zephyr IP66 9Klm 840 Grey	9,100	62.5	146	4000	515 x 190 x 114	2.5
0050585	Zephyr IP66 15Klm 840 Grey	14,700	100	147	4000	575 x 242 x 124	3.4
0050586	Zephyr IP66 20Klm 840 Grey	20,300	138	147	4000	615 x 262 x 124	4.2
0050587	Zephyr IP66 4klm 830 Grey	4,050	27	150	3000	515 x 190 x 114	2.5
0050588	Zephyr IP66 6klm 830 Grey	6,200	43	144	3000	515 x 190 x 114	2.5


Photometric Data




Zephyr 4 klm




Zephyr 6 klm



Zephyr 9 klm



Zephyr 15 klm




Zephyr 20 klm

Zephyr


PRO




Dimensions (mm)

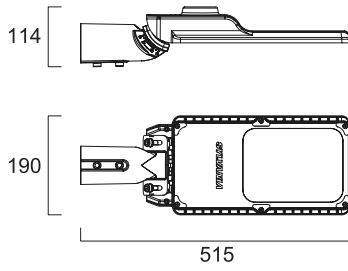

Zephyr 4/6/9 klm

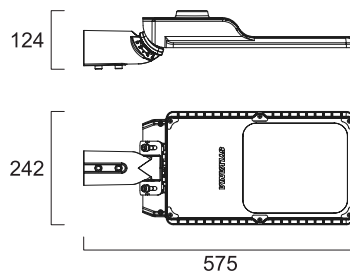

Zephyr 15 klm

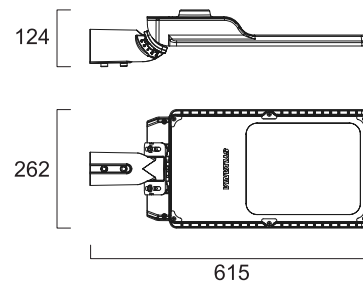

Zephyr 20 klm

Additional Images



Zephyr 4/6 klm



Zephyr 9 klm



Zephyr 15 klm



Zephyr 20 klm



SYLVANIA



CE UK
CA

in f  

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. March 2025

sylvania-group.com

A Feilo Sylvania Company